


O-ring/X-ring Guide

FRIDLE
GROUP
SEALING EXPERTS

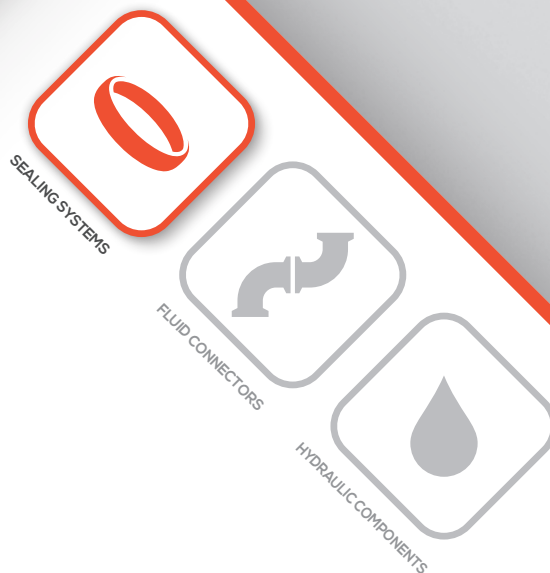

Guida O-ring/X-ring | O-ring/X-ring guide

Sigla Ref			Dimens.	
EUR	USA	X-ring	DI	DE
1.78				
2007	004		1.78	5.34
2010	005		2.57	6.13
2012	006	1	2.90	6.46
2015	007	2	3.68	7.24
2018	008	3	4.47	8.03
		3A	4.62	8.18
2021	009	4	5.28	8.84
		4A	5.70	9.26
2025	010	5	6.07	9.63
		5A	6.65	10.21
106	610		6.75	10.31
2031	011	6	7.65	11.21
		6A	8.70	12.26
108	611		8.73	12.29
2037	012	7	9.25	12.81
		7A	9.70	13.26
2043	013	113	10.82	14.38
114	806		11.11	14.67
2050	014	114	12.42	15.98
2056	015	115	14.00	17.56
2062	016	116	15.60	19.16
2068	017	117	17.17	20.73
2075	018	118	18.77	22.33
2081	019	119	20.35	23.91
2087	020	120	21.95	25.51
2093	021	121	23.52	27.08
2100	022	122	25.12	28.68
2106	023	123	26.70	30.26
2112	024	124	28.30	31.86
2118	025	125	29.87	33.43
2125	026		31.47	35.03
2131	027		33.05	36.61
2137	028		34.65	38.21
2150	029		37.82	41.38
2162	030		41.00	44.56
2175	031		44.17	47.73
2187	032		47.35	50.91
2200	033		50.52	54.08
2212	034		53.70	57.26
2225	035		56.87	60.43
2237	036		60.05	63.61
2250	037	137	63.22	66.78
2262	038		66.40	69.96
2275	039		69.57	73.13
2287	040		72.75	76.31
2300	041		75.92	79.48
2325	042		82.27	85.83
2350	043		88.62	92.18
2375	044		94.97	98.53
2400	045		101.32	104.88
2425	046		107.67	111.23
2450	047		114.02	117.58
2475	048		120.37	123.93
2500	049		126.72	130.28
2525	050		133.07	136.63
2537	550		135.76	139.32
2550	551		138.94	142.50

Sigla Ref			Dimens.	
EUR	USA	X-ring	DI	DE
2562	552		142.11	145.67
2575	553		145.29	148.85
2587	554		148.46	152.02
2600	555		151.64	155.20
2612	556		154.81	158.37
2625	557		158.00	161.56
2637	558		161.16	164.72
2652	559		164.34	167.90
2662	560		167.51	171.07
2675	561		170.69	174.25
2687	562		173.87	177.43
2.62				
	102		1.24	6.48
3010	103		2.06	7.30
3012	104		2.84	8.08
3015	105		3.63	8.87
3018	106		4.42	9.66
3021	107		5.23	10.47
3024	108		6.02	11.26
3030	109		7.59	12.83
	109		9.13	14.37
3037	110	8	9.12	14.36
		8A	9.80	15.04
112	613		9.90	15.14
3043	111	9	10.77	16.01
		9A	11.70	16.94
	115	614	11.91	17.15
3050	112	10	12.37	17.61
		12A	12.80	18.04
117	615		13.10	18.34
		10B	13.70	18.94
3056	113	11	13.94	19.18
		11A	14.70	19.94
119	616		15.08	20.32
3062	114	12	15.54	20.78
121	809		15.88	21.12
			16.20	21.44
3068	115	13	17.12	22.36
		13A	17.75	22.99
123	617		17.86	23.10
3075	116	14	18.72	23.96
		14A	19.60	24.84
		217	20.24	25.48
3081	117		20.30	25.54
128	812		20.64	25.88
3087	118	218	21.89	27.13
130	813		22.3	27.54
3093	119	219	23.47	28.71
132	814		23.81	29.05
3100	120	220	25.07	30.31
3106	121	221	26.64	31.88
3112	122	222	28.24	33.48
3118	123	223	29.82	35.06
3125	124	224	31.42	36.66
3131	125	225	32.99	38.23
3137	126	226	34.59	39.83
3143	127	227	36.17	41.41
3150	128	228	37.37	42.61

Sigla Ref			Dimens.	
EUR	USA	X-ring	DI	DE
3156	129	229	39.34	44.58
3162	130	230	40.95	46.19
3168	131	231	42.52	47.76
3175	132		44.12	49.36
3181	133		45.69	50.93
3187	134		47.29	52.53
3193	135		48.90	54.14
3200	136		50.47	55.71
3206	137		52.07	57.31
3212	138		53.64	58.88
3218	139		55.25	60.49
3225	140		56.82	62.06
3231	141		58.42	63.66
3237	142		59.99	65.23
3243	143		61.60	66.84
3250	144		63.17	68.41
3256	145		64.77	70.01
3262	146		66.34	71.58
3268	147		67.95	73.19
3275	148		69.52	74.76
3281	149		71.12	76.36
3287	150		72.69	77.93
3300	151		75.87	81.11
3325	152		82.22	87.46
3350	153		88.57	93.81
3375	154		94.92	100.16
3400	155		101.27	106.51
3425	156		107.62	112.86
3450	157		113.97	119.21
3475	158		120.32	125.56
3500	159		126.67	131.91
3525	160		133.02	138.26
3550	161	261	139.37	144.61
3575	162		145.72	150.96
3600	163		152.07	157.31
3625	164		158.42	163.66
3650	165		164.77	170.01
3675	166		171.12	176.36
3700	167		177.47	182.71
3725	168		183.82	189.06
3750	169		190.17	195.41
3775	170		196.52	201.76
3800	171		202.87	208.11
3825	172		209.22	214.46
3850	173		215.57	220.81
3875	174		221.92	227.16
3900	175		228.27	233.51
3925	176		234.62	239.86
3950	177		240.97	246.21
3975	178		247.32	252.56
3.53				
4021	201		4.34	11.40
4024	202		5.94	13.00
4028	203		7.52	14.58
4036	204		9.12	16.18
4042	205		10.69	17.75
4050	206		12.29	19.35
4055	207		13.87	20.93

Sigla Ref			Dimens.	
EUR	USA	X-ring	DI	DE
4061	208		15.47	22.53
4067	209		17.04	24.01
4075	210	15	18.64	25.70
4081	211	16	20.22	27.28
		16A	20.90	27.96
4087	212	17	21.82	28.88
4093	213	18	23.39	30.45
		18A	23.99	31.05
4100	214	19	24.99	32.05
134	618		25.80	32.86
		19A	25.90	32.96
4106	215	20	26.57	33.63
		20A	27.57	34.63
4112	216	21	28.17	35.23
4118	217	22	29.74	36.80
4125	218	23	31.34	38.40
		23A	32.04	39.10
4131	219	24	32.92	39.98
		24A	33.80	40.86
4137	220	25	34.52	41.58
4143	221	26	36.09	43.15
4150	222	27	37.69	44.75
144	824		39.70	46.76
4162	223	323	40.87	47.93
146	825		41.28	48.34
147	826		42.86	49.92
4175	224	324	44.04	51.10
149	827		44.95	52.01
150	828		46.04	53.10
4187	225	325	47.22	54.28
152	829		47.62	54.68
153	830		49.20	56.26
4200	226	326	50.39	57.45
155	831		50.80	57.86
156	832		52.40	59.46
4212	227	327	53.57	60.63
158	833		53.97	61.03
159	834		55.56	62.62
4225	228	328	56.74	63.80
161	835		57.15	64.21
162	836		58.74	65.80
4237	229	329	59.92	66.98
164	837		60.32	67.38
165	838		61.90	68.96
4250	230	330	63.09	70.15
167	839		63.50	70.56
168	840		65.10	72.16
4262	231	331	66.27	73.33
170	841		66.67	73.73
171	842		68.26	75.32
4275	232	332	69.44	76.50
173	843		69.85	76.91
174	844		71.44	78.50
4287	233	333	72.62	79.68
176	845		73.02	80.08
177	846		74.60	81.66
4300	234	334	75.79	82.85
4312	235	335	78.97	86.03

Sigla Ref			Dimens.	
EUR	USA	X-ring	DI	DE
4325	236	336	82.14	89.20
4337	237	337	85.32	92.38
4350	238	338	88.49	95.55
4362	239	339	91.67	98.73
4375	240	340	94.84	101.90
4387	241	341	98.02	105.08
4400	242	342	101.19	108.25
4412	243		104.37	111.43
4425	244		107.54	114.60
4437	245		110.72	117.78
4450	246		113.89	120.95
4462	247		117.07	124.13
4475	248	348	120.24	127.30
4487	249		123.42	130.48
4500	250		126.59	133.65
4512	251		129.77	136.83
4525	252		132.94	140.00
4537	253		136.12	143.18
4550	254		139.29	146.35
4562	255		142.47	149.53
4575	256		145.64	152.70
4587	257		148.82	155.88
4600	258		151.99	159.05
4625	259		158.34	165.40
4650	260		164.69	171.75
4675	261		171.04	178.10
4700	262		177.39	184.45
4725	263	363	183.74	190.80
4750	264		190.09	197.15
4775	265		196.44	203.50
4800	266		202.79	209.85
4825	267		209.14	216.20
4850	268		215.49	222.55
4875	269		221.84	228.90
4900	270		228.19	235.25
4925	271		234.54	241.60
4950	272		240.89	247.95
4975	273		247.26	254.32
41000	274		253.59	260.65
41050	275		266.29	273.35
41100	276		278.99	286.05
41150	277		291.69	298.75
41200	278		304.39	311.45
41300	279		329.79	336.85
41400	280		355.19	362.25
41500	281		380.59	387.65
41600	282		405.26	412.32
41700	283		430.66	437.72
41800	284		456.06	463.12
5.33				
6042	309		10.46	21.12
6050	310		12.07	22.73
6055	311		13.64	24.30
6060	312		15.24	25.90
6068	313		16.81	27.47
6075	314		18.42	29.08
6080	315		19.99	30.65
6085	316		21.59	32.25

Sigla Ref			Dimens.	
EUR	USA	X-ring	DI	DE
6090	317		23.16	33.82
6100	318		24.77	35.43
6105	319		26.34	37.00
6110	320		27.94	38.60
6115	321		29.51	40.17
6125	322		31.12	41.78
6130	323		32.69	43.35
6135	324		34.29	44.95
6150	325	28	37.47	48.13
		28A	39.64	50.30
6162	326	29	40.64	51.30
		29A	41.80	52.46
6175	327	30	43.82	54.48
		30A	45.04	55.70
		30B	45.84	56.50
6187	328	31	46.99	57.65
		31A	47.80	58.46
6200	329	32	50.17	60.83
		32A	52.00	62.66
6212	330	33	53.34	64.00
		33A	54.50	65.16
6225	331	34	56.52	67.18
		34A	57.52	68.18
6237	332	35	59.69	70.35
		35A	61.54	72.20
6250	333	36	62.87	73.53
		36A	64.59	75.25
6262	334	37	66.04	76.70
		37A	67.64	78.30
6275	335	38	69.22	79.88
		38A	70.64	81.30
6287	336	39	72.39	83.05
		39A	73.84	84.50
178	619		74.63	85.29
6300	337	40	75.57	86.23
6312	338	41	78.74	89.4
181	620		79.73	90.39
		41A	80.09	90.75
6325	339	42	81.92	92.58
		42A	83.39	94.05
6337	340	43	85.09	95.75
		43A	86.64	97.30
6350	341	44	88.27	98.93
185	621	44A	89.69	100.35
6362	342	45	91.44	102.10
6375	343	46	94.62	105.28
6387	344	47	97.79	108.45
189	622		100.00	110.66
6400	345	48	100.97	111.63
		48A	102.34	113.00
6412	346	49	104.14	114.80
		49A	105.80	116.46
6425	347	50	107.32	117.98
193	623		109.54	120.20
6437	348	51	110.49	121.15
6450	349	52	113.67	124.33
6500	350	450	116.84	127.50
199	860		117.48	128.14